


SOLID HARDWOOD ENGINEERED WOOD




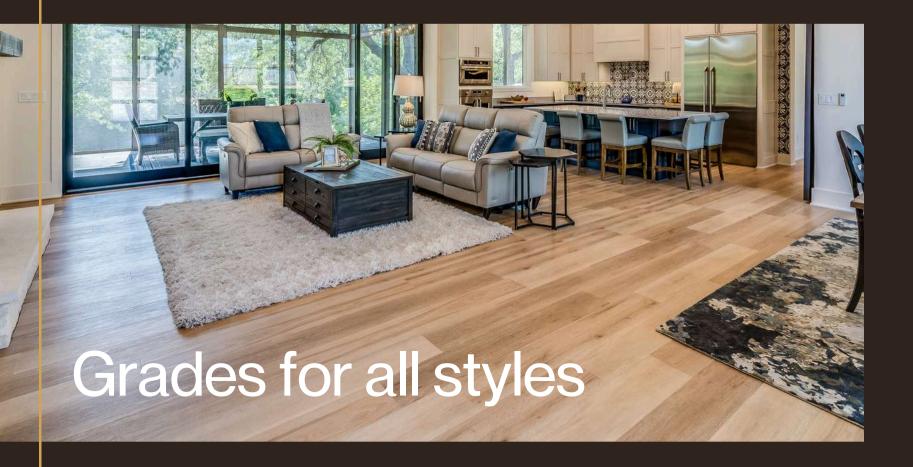

The grade of wood is one way to classify hardwood flooring according to the different plank textures and natural features. Knots, mineral streaks, shakes and checks, or other character traits do not impact the quality of the planks. The choice of grade is also a matter of design preference and will depend on the look that you want your floor to have. Wickham Flooring offers up to 5 grades of wood depending on the range of hardwood or engineered wood floors that you choose.

Note that images in. this guide are included for illustrative purposes only. Display screens and printed material can never exactly reproduce all the variations and subtleties of wood textures. Please refer, at all times, to natural samples.

Maple

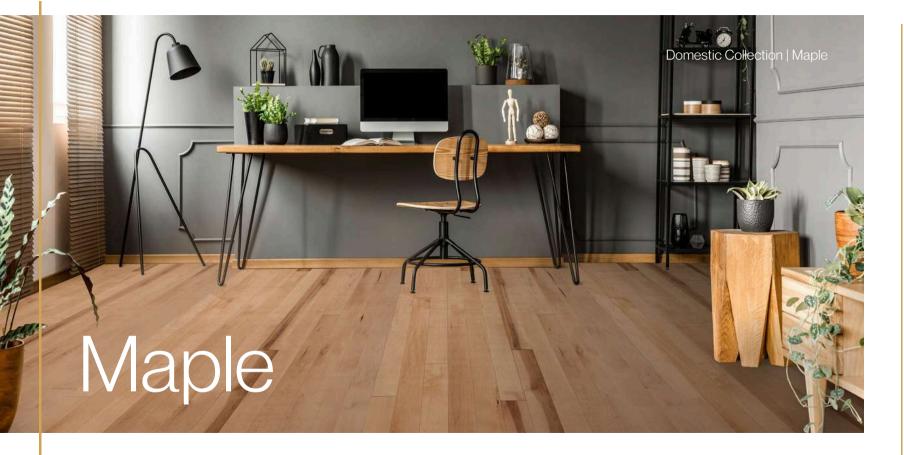

SELECT AND BETTER CANADIAN PLUS COTTAGE BUILDER SELECT


LEGEND







Engineered wood



Select and Better

AVAILABLE WIDTHS

Contact customer service to check availability.



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)



Canadian Plus

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Naturel

AVAILABLE WIDTHS


2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)



Cottage

VAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Sélect

AVAILABLE WIDTHS

5 in. (127 mm) | 7 in. (178 mm)



- Natural sapwood color, with a clear and uniform appearance.
- Minimum length of 14 inches
- Average length of 30 to 32 inches
- Pin knots of 1/16", open or not, accepted





- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted





- Mix of coloring, from moderate to pronounced.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 25 to 29 inches
- Pin knots of 1/16", open or not, accepted



WICKHAM EI OOBING LABADE GLIID



- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches





- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 27 to 29 inches





- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only






Engineered wood flooring

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Minimum length of 12 inches
- Average length of 40 to 43 inches
- Pin knots of 1/16", open or not, accepted



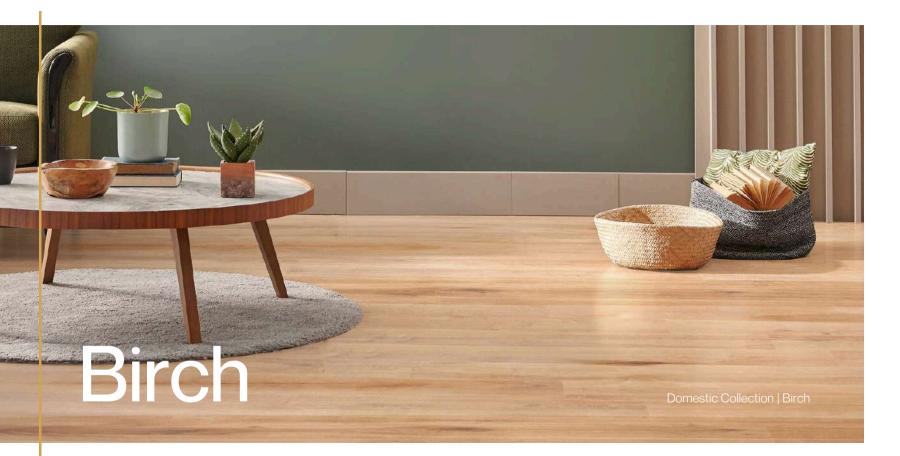

SPECIES Birch





AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)

CANADIAN PLUS COTTAGE BUILDER

LEGEND



Solid hardwood



Engineered wood



- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted





- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches





- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 27 to 29 inches





- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only





SELECT AND BETTER CANADIAN PLUS COTTAGE BUILDER SELECT

LEGEND



S Solid hardwood



Engineered wood

Red Oak



Select and Better

VAILABLE WIDTHS

Contact customer service to check availability.



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Canadian Plus

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Sélect

AVAILABLE WIDTHS

5 in. (127 mm) | 7 in. (178 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)

Select & Better Grade

- Natural sapwood color, with a clear and uniform appearance.
- Minimum length of 14 inches
- Average length of 30 to 32 inches
- Pin knots of 1/16", open or not, accepted
- * Available on request only



Canadian Plus Grade

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted

* Red Oak is available in a brushed finish in this grade



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

WICKHAM FI OOBING I GBADE GLIIDI

Cottage Grade

- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

WICKHAM EL OOBING LABADE GLIIDE

Builder Grade

- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 22 to 25 inches



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

WICKHAM EL COBING LEBARE EL IIDE

Rustic Grade

- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

TI O EL CONICO EL MANACION

Select Grade

Engineered wood flooring

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Minimum length of 12 inches
- Average length of 40 to 43 inches
- Pin knots of 1/16", open or not, accepted

* Red Oak is available in a brushed finish in this grade



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

MICKHAM EI OOBING I GRADE GUIL



CANADIAN PLUS BUILDER COTTAGE SÉLECT

LEGEND



S Solid hardwood



Engineered wood

White Oak



Canadian Plus

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Sélect

AVAILABLE WIDTHS

5 in. (127 mm) | 7 in. (178 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)

White Oak

Canadian Plus Grade

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 28 to 35 inches
- Pin knots of 1/16", open or not, accepted

* White oak is available in a brushed finish in this grade



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

VICKHAM EI OOBING I GBADE GI III



SPECIES

White Oak

Cottage Grade

- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches

SPECIES White Oak

Builder Grade

- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 27 to 29 inches



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

MCKHAM EI OOBING LOBADE

SPECIES White Oak



- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only



White Oak

Select Grade

Engineered wood flooring

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Minimum length of 12 inches
- Average length of 40 to 43 inches
- Pin knots of 1/16", open or not, accepted

* White oak is available in a brushed finish in this grade



White Oak

Cottage Grade

Engineered wood flooring

- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 12 inches
- Average length of 40 to 43 inches



Please note that the wood sample photos are for reference purposes only. Wood is a natural and living material, and as such, its colors, textures, and grain patterns may vary from one sample to another and from the final installed product. These variations are part of the natural beauty of real wood.

WICKHAM EL OOBING LEBADE GLIIL


LEGEND





Engineered wood

Silver Maple



Canadian Plus

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Silver Maple

Canadian Plus Grade

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted



Silver Maple

Cottage Grade

- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches



Builder Grade

- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 27 to 29 inches

• Knots, and shakes and checks accepted

Silver Maple

- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only





CANADIAN PLUS BUILDER COTTAGE

LEGEND



S Solid hardwood



Engineered wood

Ash



Canadian Plus

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Builder

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm)



Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Sélect

AVAILABLE WIDTHS

5 in. (127 mm) | 7 in. (178 mm)



- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted

* Ash is available in a brushed finish in this grade





Cottage Grade

- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches

VICKHAM EI OOBING I GBADE GI III



Builder Grade

- Mix of coloring, from moderate to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 27 to 29 inches



Rustic Grade

- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only

WICKHAM EI OOBING | GBADE GI



Engineered wood flooring

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Minimum length of 12 inches
- Average length of 40 to 43 inches
- Pin knots of 1/16", open or not, accepted

* Ash is available in a brushed finish in this grade







AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Cottage

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)



Hickory

Rustic

AVAILABLE WIDTHS

2 1/4 in. (57 mm) | 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) | 5 in. (127 mm)

Hickory Domestic Collection | Hickory

LEGEND



S Solid hardwood



Engineered wood





Canadian Plus Grade

- Combination of sapwood and natural color variation.
- Black or brown mineral streaks accepted
- Sound closed knots accepted, no paste filler accepted
- Minimum length of 12 inches
- Average length of 30 to 36 inches
- Pin knots of 1/16", open or not, accepted



Hickory

Cottage Grade

- Combination of coloring, from light to pronounced, with rustic character.
- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 32 to 38 inches

Rustic Grade

- All color variations accepted
- Knots, and shakes and checks accepted
- Pith and worm holes accepted
- Minimum length of 10 inches
- Average length of 12 to 15 inches
- On accumulation only



Comparison Chart Solid hardwood 2 1/4 in. (57 mm) 3 1/4 in. (83 mm) 4 1/4 in. (108 mm) 5 in. (127 mm) Engineered wood Maple Contact customer service to check availability. Canadian Plus Builder Birch Canadian Plus • Cottage Red Oak Canadian Plus Cottage White Oak Canadian Plus

•

•

0

•

0

•

•

7 in. (178 mm)

.

Builder

Cottage Select

Cottage Ash

Sélect

Hickory

Silver Maple
Canadian Plus
Builder