


Adequate acclimation

is essential to the success of
a hardwood floor.



Long-term performance of your hardwood floor begins even before installation. Proper acclimation helps minimize expansion, contraction, and other moisture-related issues, ensuring the beauty and durability of your floor for years to come.

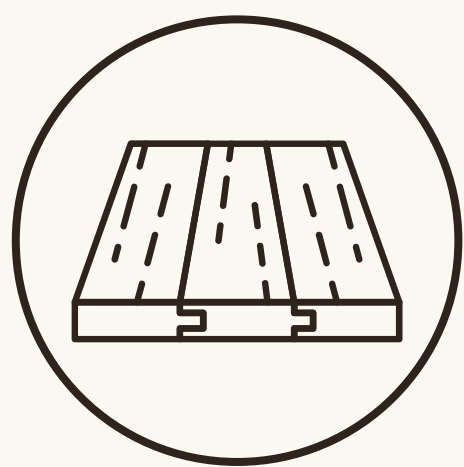

Before installation, make sure to:



Maintain an indoor temperature
between 19°C and 22°C (66°F to 72°F).




Maintain a relative humidity level
between 45% and 55%.



Store the flooring on-site for a
minimum of 72 hours before
installation.




Never open the boxes or the ends of
the cartons before installation begins.




Ensure that all moisture-generating
work is completed and that the job
site is air-conditioned and properly
climate-controlled.




Humidity is a key factor:



Ideal subfloor moisture content: 8% to
10% (must never exceed 12%).



Maximum moisture difference
between the subfloor and the flooring:
4%.



For boards 4 inches and wider, the
moisture difference must not exceed
2%.



A stable environment

is the secret to a durable and high-
performing hardwood floor.



Protect your investment.

Follow Wickham Flooring installation
guidelines to ensure optimal performance
and lasting beauty.

If you have any questions, please contact Wickham
Flooring customer service or your sales representative.

+1 819 398-6303

wickhamhardwood.com

